

DUOX

Free standing double awning






- The Monobloc system is used for both awnings on the structure with just one single rolling tube.
- Very stable structure thanks to reinforced angle joints, which make it more reliable and durable, even in the largest sizes.
- Can be left affixed to the floor year-round, or optionally dismantled depending on the time of year.
- Its anti-wind blocking system helps to keep the arms from moving upwards in the event of convection currents.
- Very versatile finish, with or without a fabric protection system.



- Reinforcement system that helps to stabilize the installation during the assembly work and also increases its resistance.
- Easy installation thanks to the efficient configuration of the component parts.

Maximum dimensions (m)

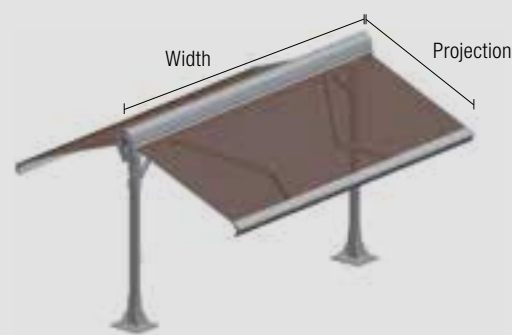

No Arms	Max. width	Max. projection
2	6,00	3,00 + 3,00

Operation

- ☒ Manual
- ☒ Motorised
- ☒ Automated

Mounting

-  Surface
-  Built-in

Lighting possibilities

- ☐ Cassette profile
- ☐ Front profile
- ☒ Arms (Onyx Lux)

Recommendation: always use a motor for projections over 2,00 m

Accessories



Valance

Finishes

- Lacquer in accordance with QUALICOAT standards
- Stainless steel screws and bolts
- Arms with integral laquering

Usual installations

- Terraces 
- Large terraces 
- HORECA 
- Garden 

Classification

Standards: UNE-EN 13561:2015

-  Wind
Up to 28 km/h
-  Durability
10.000 maneuvers min.

Recommended with arms

LLAZA-ONYX System



- Onyx-400
- Onyx Lux-400

LLAZA-SPLENDOR System



- Splendor-400


Compatible with arms




- Onyx-400
- Onyx Lux-400
- Splendor-400

Dimensions (mm)




Dimensions with Texpro profile

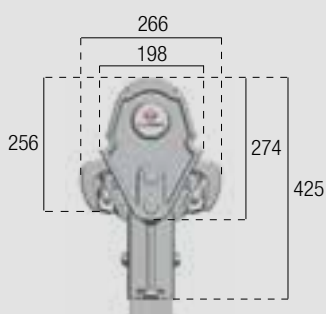


Dimensions without Texpro profile

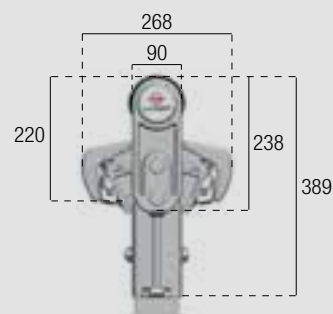

Texpro: Optional semicassette for fabric protection

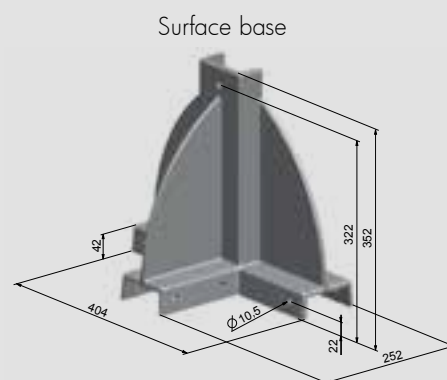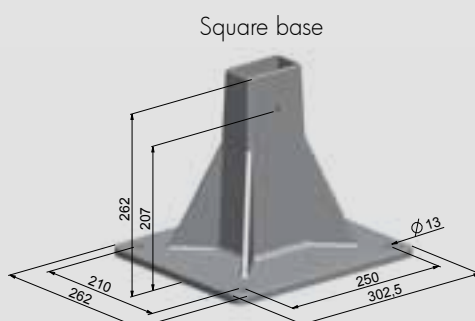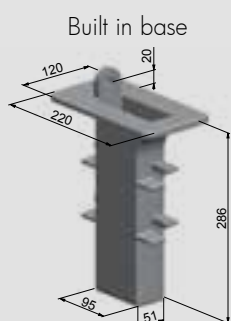

Slope

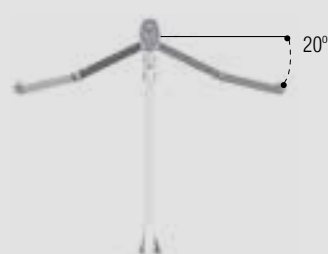

Minimum width for recommended arms (m)

Projection	Minimum width
	2 Arms
1,50 + 1,50	2,80
1,75 + 1,75	3,05
2,00 + 2,00	3,30
2,25 + 2,25	3,55
2,50 + 2,50	3,80
2,75 + 2,75	4,05
3,00 + 3,00	4,30

Max. dimensions for recommended fabrics (with Texpro) (m)

Width x projection		2 Arms
RECAORIL	RECACRIL	6,00 x 3,00
	RECSYSTEM	6,00 x 3,00
	RECWATER	4,75 x 2,50
RECScreen	RecScreen 4000P - 1%	6,00 x 2,50
	RecScreen 6000 - 2%	4,50 x 2,50
	RecScreen 7000 - 3%	6,00 x 2,50
	RecScreen RAINLESS	4,75 x 2,50
PVC	RECAFLEX PRO	4,75 x 2,50





www.llaza.com

mk@llaza.com
export@llaza.com
T. +34 977 990 600
F. +34 977 990 610

LLAZA WORLD, S.A.
Tramuntana, 1
Pol. Ind. Roques Roges
43460 ALCOVER — Spain